



## **Nastavenie VOIP údajov siete EuroFon do telefónu Siemens C450IP .**



**Siemens C450IP**

**Pripojte základňu telefónu k vášmu PC a k napájacej sieti. Nasledujúce údaje budeme nastavovať cez webový prehliadač. Ten spustíte vo vašom počítači, ktorý je pripojený k základni telefónu a do prehliadača zadáte 192.168.1.1 a potvrdíte „Enter“. Tým sa dostanete do konfiguračného rozhrania vašej základňovej stanice, kde budete postupovať podľa nasledovných pokynov.**


## Gigaset CE 450 IP R



SIEMENS

**Zadáme štandardný PIN "0000" a stlačíme OK.**

## Gigaset CE 450 IP R

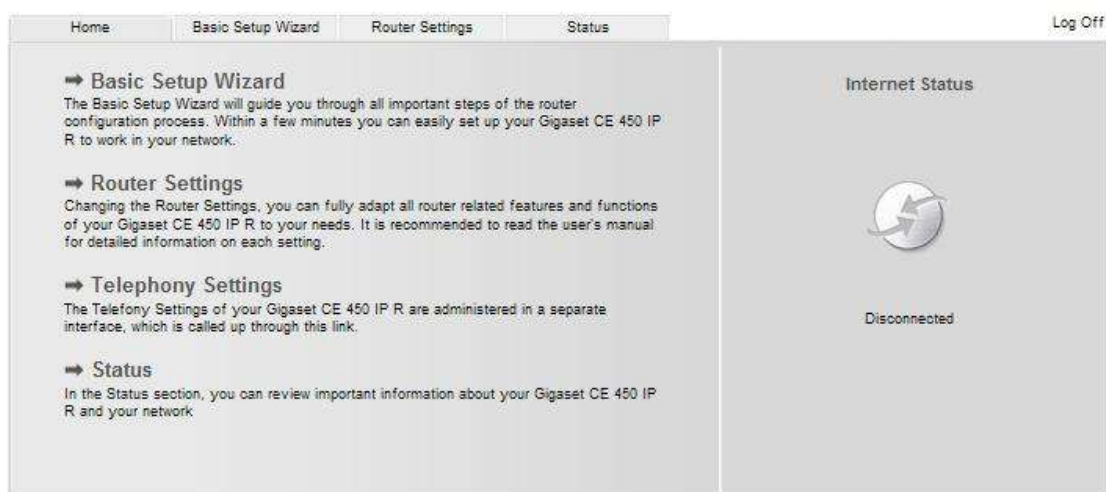

SIEMENS

**Klikneme na  
Telephony Settings**

# Gigaset CE 450 IP R

Login

Welcome

You can use this interface to administer your device. For your security, the configuration program is protected with the system pin.

Language for menus and dialogs

English

Please enter your system pin

OK

SIEMENS

**Tu opäť zadáme štandardný PIN “0000“ s stlačíme OK.**

# Gigaset CE 450 IP R

Home Settings Status Log Off

⇒ Settings  
In Changing the Settings, you can fully adapt all features and functions of your device to your needs. It is recommended to consult the user manual in the internet for detailed information on each setting.

⇒ Status  
In the Status section, you can review important information about your device and your network.

⇒ Router Settings  
The Router Settings of your Gigaset CE 450 IP R are administered in a separate interface, which is called up through this link.

SIEMENS

**Klikneme na  
Settings**

## Gigaset CE 450 IP R

Home Settings Status Log Off

IP Configuration  
Telephony  
Messaging  
Miscellaneous

Address Assignment  
IP address type: Obtained automatically

Remote Management  
Allow access from other networks:  Yes  No

Activating this parameter increases the risk of unauthorised access to your device settings.

Set Cancel

SIEMENS

**Tu môžeme znova meniť nastavenie siete, prípadne iných funkcií týkajúcich sa telefónu. Pre nás je dôležité kliknúť na Telephony.**

## Gigaset CE 450 IP R

Home Settings Status Log Off

IP Configuration  
Telephony  
Connections  
Audio  
Number Assignment  
Dialing Plans  
Advanced Settings  
Messaging  
Miscellaneous

IP Connection

Name	Status	Active
IP1	Registration failed	<input checked="" type="checkbox"/>
IP2	Disabled	<input type="checkbox"/>
IP3	Disabled	<input type="checkbox"/>
IP4	Disabled	<input type="checkbox"/>
IP5	Disabled	<input type="checkbox"/>
IP6	Disabled	<input type="checkbox"/>

Gigaset.net

Name	Status	Active
Gigaset.net	Registration failed	<input checked="" type="checkbox"/>

SIEMENS

**V tomto okne môžeme zadať až 6 VOIP účtov, ktoré budú v základni nastavené a ktoré budú platné pre definované bezdrôtové rúčky. Na začiatok nám stačí definovať 1. účet IP1. Stlačíme Edit**

# Gigaset CE 450 IP R

The screenshot shows the '1. IP Connection' configuration page. The left sidebar has 'Connections' selected. The main area contains the following fields and options:

- Connection Name or Number: 0650123456
- Provider: Other Provider (with a 'Select VoIP Provider' button)
- Personal Provider Data:
  - Authentication Name: 0650123456
  - Authentication password: [masked]
  - Username: 0650123456
  - Display name: Ján Biely 0650123456
- Call Forwarding:
  - Status:  On  Off
  - When:  When busy  No reply  Always
  - Call number: [empty field]

Buttons at the bottom: 'Show Advanced Settings', 'Set', and 'Cancel'.

SIEMENS

**Connection Name or Number : zadajte Vaše telefónne číslo**  
**Autentification Name : zadajte Vaše telefónne číslo**  
**Autentification password : zadajte Vaše heslo**  
**Display name : zadajte Vaše meno a telefónne číslo**  
**Ďalej kliknite na : Show Advanced Settings**

The screenshot shows the 'Show Advanced Settings' page. The top button is 'Hide Advanced Settings'. The settings are organized into two sections:

- General Provider Data:**
  - Domain: sip.eurofon.sk
  - Proxy server address: sip.eurofon.sk
  - Proxy server port: 5060
  - Registrar server: sip.eurofon.sk
  - Registrar server port: 5060
  - Registration refresh time: 180 sec
- Network:**
  - STUN enabled:  Yes  No
  - STUN server: sip.eurofon.sk
  - STUN port: 3478
  - STUN refresh time: 240 sec
  - NAT refresh time: 20 sec
  - Outbound proxy mode:  Always  Auto  Never
  - Outbound proxy: [empty field]
  - Outbound proxy port: 5060

Buttons at the bottom: 'Set' and 'Cancel'.

SIEMENS

**Ďalšie údaje nastavte podľa obrázka.**

<b>Domain</b>	<b>: sip.eurofon.sk</b>
<b>Proxy server address</b>	<b>: sip.eurofon.sk</b>
<b>Register server</b>	<b>: sip.eurofon.sk</b>
<b>STUN server</b>	<b>: sip.eurofon.sk</b>

**Uložte nastavenie stlačením tlačidla „SET“ a reštartujte telefónnu základňu cez „Log off“ v pravom hornom rohu.**

